

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/103438 A1

- (51) International Patent Classification⁷: A45C 9/00, A45F 3/02
- (21) International Application Number: PCT/SE03/00982
- (22) International Filing Date: 11 June 2003 (11.06.2003)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
0201772-1 11 June 2002 (11.06.2002) SE
- (71) Applicant (for all designated States except US): GÖTESSON INDUSTRI AB [SE/SE]; Växtorpssvägen 6, S-514 61 Dalstorp (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): GÖTESSON, Ola [SE/SE]; Rönnvägen 6, S-514 60 Dalstorp (SE). GÖTESSON, Johan [SE/SE]; Örlögsvägen 44, S-302 72 Halmstad (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: BAG

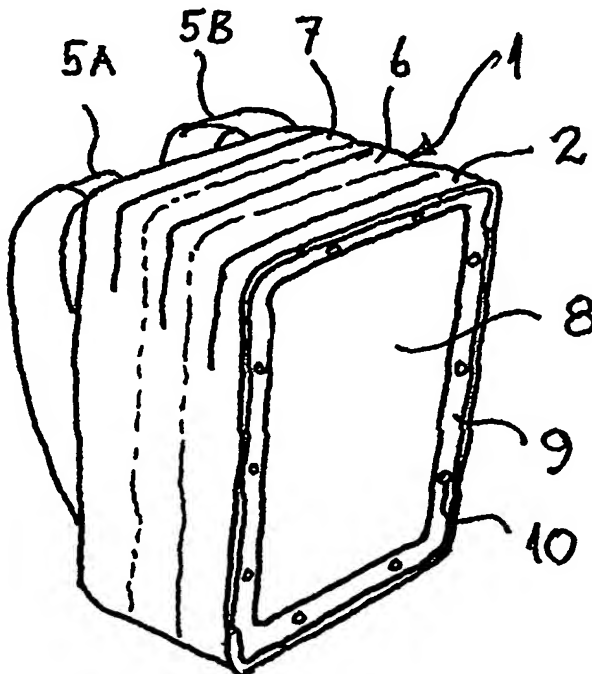

(57) Abstract: A rucksack/bag (1) for carrying during transport, in which the rucksack/bag (1) comprises at least one detachable plane work surface (3), preferably a harder panel, in which the underside of the plane work surface (3) is joined to a soft, deformable unit (3) filled with soft, rounded beads.

WO 03/103438 A1